


Product Feature

- ◆ Intelligent lighting to attract customer attention
- ◆ Pure flat design with narrow edge
- ◆ Multiple mounting options including horizontal bracket mount, vertical bracket mount and VESA mount.
- ◆ ETL, FCC, CE, CB, RoHS, CCC certificates.
- ◆ Other size can be customized

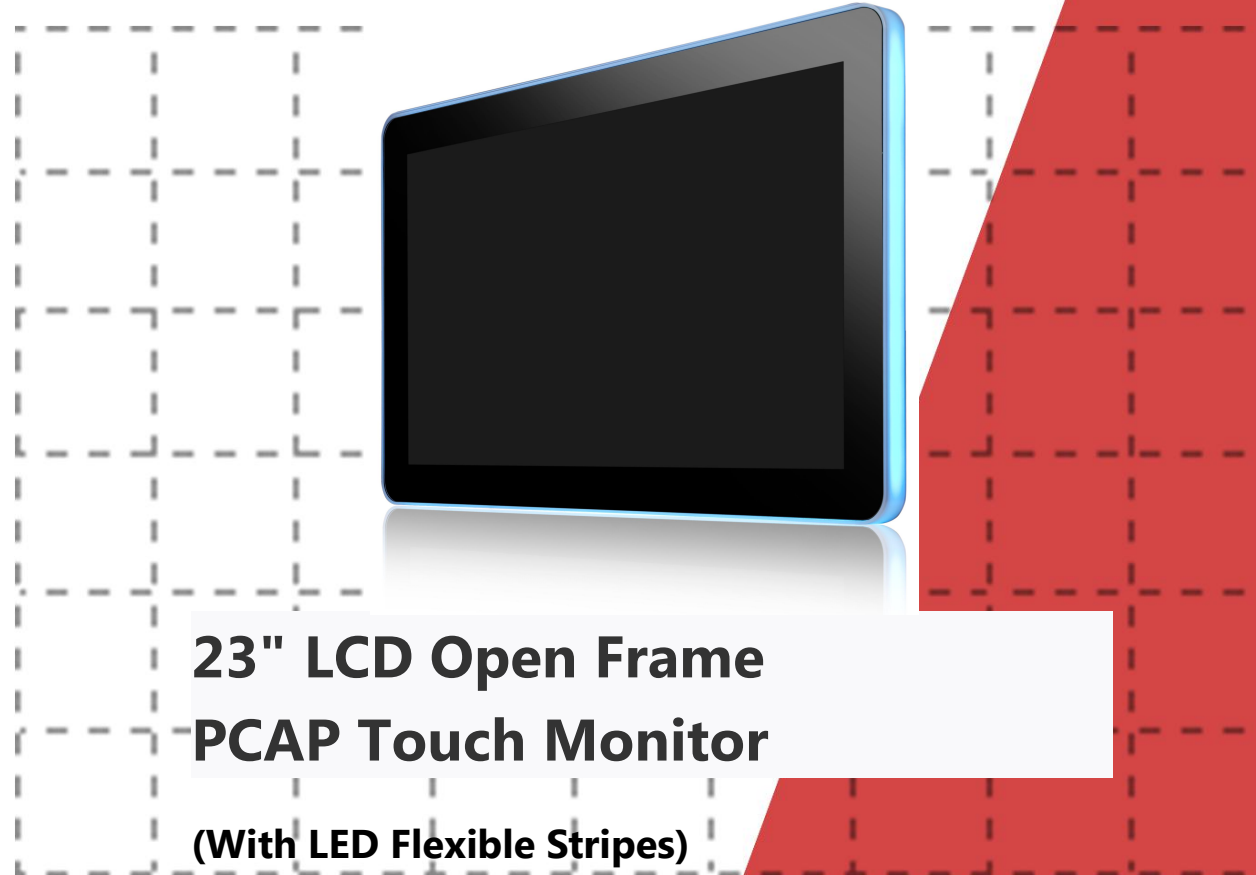

LED Stripes
- 15 Colors
- 5 Modes

Application

- ◆ Gaming and casino
- ◆ Interactive digital signage
- ◆ Point-of-information
- ◆ Self-service/service automation
- ◆ Customized Solutions

Specification	Model: KOT-0230U-CA5P	
Series	OT, With LED Flexible Strips	
Display Type	16:9 Ratio 23" Active matrix TFT-LCD	
Display Active Area	511.8mm×289mm	
Monitor Dimensions	Width: 588.2mm Height: 365.4mm Depth: 45mm	
Suggested Resolution	1920×1080 @ 60Hz	
Support Colors	16.7M	
Brightness(Typ.) Brightness from 300~1000cd/m² can be customized	Pure LCD Panel	250cd/m ²
	With Projected Capacitive Touchscreen	212cd/m ²
Display Response Time(Typ.)	14ms	
Viewing Angle(Typ.at CR>10) (Other viewing angle can be custom)	Horizontal(left/right)	89°/ 89°
	Vertical(up/down)	89°/ 89°
Video Input	VGA and DVI and HDMI	
Frequency(H/V)	30~80KHz / 60~75Hz	
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz	
Environment	Operating Temp.	0~50° C
	Storage Temp.	-20~60° C
	Operating RH	20%~80%
	Storage RH	10%~90%
MTBF	30,000 Hours	
Back Light Life(Typ.)	30,000 Hours	
Power Consumption	37W(approximately, Includes touch display and LED stripes)	
Standby Power Consumption	0.6W (approximately, Touch display only)	
Mount Interface	VESA 100*300mm and 100*400mm	
OSD Control	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Touch Screen Type	23" Projected Capacitive Touchscreen, 10 points in win7	
Touch System Interface	USB	
Agency Approval	ETL, FCC, CE, CB, RoHS, CCC	
Regular Warranty	1 Year	

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model