


### Product Feature

- ◆ Bezel seal standard: NEMA3 and IEC IP65
- ◆ Multiple mounting options including horizontal bracket mount, vertical bracket mount and VESA mount.
- ◆ Long lasting product cycle-enclosure controlled by KeeTouch specifications
- ◆ Designed to be ideal for the rigors of public use
- ◆ ETL, FCC, CE, CB, RoHS, CCC certificates.
- ◆ Can be supported by KeeTouch's PCAP or SAW technology
- ◆ Other size can be customized

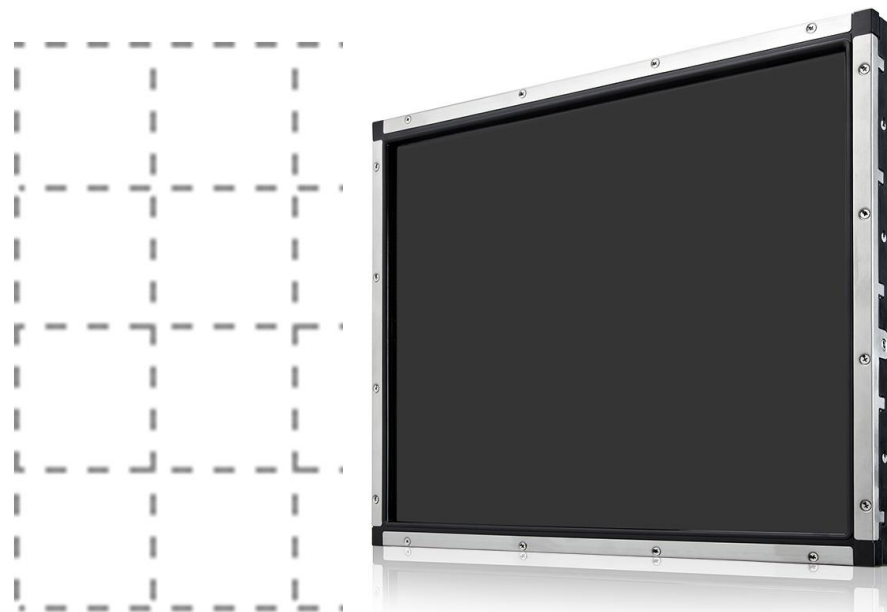

### 15", 17", 19" LCD Open Frame SAW Touch Monitor

(The Water-Proof and Compact Type)

### Application

- ◆ ATM
- ◆ Gaming and casino
- ◆ Industrial automation
- ◆ Medical equipment
- ◆ Point-of-information & transportation kiosks
- ◆ POS solutions
- ◆ Self-service/service automation
- ◆ Customized Solutions



Specification		15-inch model	17-inch model	19-inch model
<b>Series</b>		OT, Water-Proof and Compact for 4mm Touch Screen Glass		
<b>LCD Type</b>		Active Matrix TFT-LCD, LED Backlight		
<b>Display Active Area</b>		12" (304.1mm)×9" (228.1mm)	13.3" (338mm)×10.6" (270mm)	14.8"(376mm)×11.85"(301mm)
<b>Touch Monitor Dimensions</b>		Width: 336.4mm Height: 264.4mm Depth: 43.9mm	Width: 369mm Height: 307mm Depth: 49mm	Width: 416mm Height: 344mm Depth: 54mm
<b>Support Colors</b>		16.2M	16.7M	16.7M
<b>Suggested Resolution (Other resolution supported)</b>		1024×768@60Hz	1280×1024@60Hz	1280×1024@60Hz
<b>Aspect Ratio</b>		4:3	5:4	5:4
<b>Display Response Time(Typ.)</b>		5ms		
<b>Brightness(Typ.)</b>	Pure LCD Panel	250cd/m <sup>2</sup>		
	With SAW Glass	225cd/m <sup>2</sup>		
<b>Brightness from 300~1000cd/m<sup>2</sup> can be customized</b>				
<b>Viewing Angle (Typ. at CR&gt;10) (Other viewing angle can be custom)</b>	Horizontal (Left/ Right)	80° / 80°		
	Vertical (Up/ Down)	80° / 80°		
<b>Video Input</b>		VGA and DVI		
<b>Frequency(H/V)</b>		30~80KHz / 60~75Hz		
<b>Power Supply</b>		Type: External Brick Input (Line) Voltage: 100-240 VAC, 50-60 Hz		
<b>Environment</b>	Operating Temp.	0~50°C		
	Storage Temp.	-20~60°C		
	Operating RH	20%~80%		
	Storage RH	10%~90%		
<b>MTBF</b>		50,000 Hours	50,000 Hours	30,000 Hours
<b>Back Light Life(Typ.)</b>		50,000 Hours	50,000 Hours	30,000 Hours
<b>Power Consumption</b>		12W Max.	16W Max.	16.47W Max.
<b>Standby Power Consumption</b>		1.5W Max.	0.95W Max.	1.26W Max.
<b>Mount Interface</b>		1) VESA 75mm and 100mm 2) Mount Bracket, Horizontal or Vertical(Standard Mount Brackets Are Supplied)		
<b>OSD Control</b>	Buttons	AUTO,+,POWER,-,MENU		
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset		
<b>Touch System Interface</b>		USB and RS232		
<b>Touch Response Time</b>		USB/Serial: 8.4/10.4ms		
<b>Agency Approval</b>		ETL, FCC, CE, CB, RoHS, CCC		
<b>Regular Warranty</b>		1 Year		

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model