


## Product Feature

- ◆ Pure flat design with narrow edge
- ◆ Smart and sensitive with up to 10 touch
- ◆ Multiple mounting options including horizontal bracket mount, vertical bracket mount and VESA mount.
- ◆ ETL, FCC, CE, CB, RoHS, CCC certificates.



**15.6", 17", 18.5", 19", 21.5" LCD  
Open Frame PCAP Touch Monitor**

**(The Narrow Edge Type, Pure flat, LED backlight)**

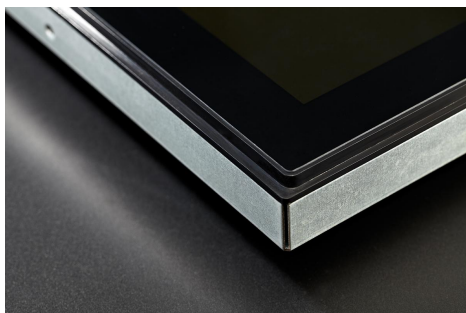

## Application

- ◆ Gaming and casino terminals
- ◆ Interactive digital signage
- ◆ Industrial automation
- ◆ Medical equipment
- ◆ Point-of-information & transportation kiosks
- ◆ POS solutions
- ◆ Self-service/service automation
- ◆ Customized Solutions

Specification	15.6-inch model	17-inch model	18.5-inch model	19-inch model	21.5-inch model
<b>Series</b>	OT, Pure flat				
<b>LCD Type</b>	Active Matrix TFT-LCD, LED Backlight				
<b>Display Active Area</b>	345.23×194.54mm	338.9×271.3mm	409.8×230.4mm	377.3×302.06mm	476.64×268.11mm
<b>Touch Monitor Dimensions</b>	Width: 382mm Height: 234mm Depth: 44.5mm	Width: 378.9mm Height: 313.3mm Depth: 45.7mm	Width: 449.4mm Height: 270mm Depth: 46mm	Width: 429mm Height: 356mm Depth: 44mm	Width: 516mm Height: 311mm Depth: 40mm
<b>Support Colors</b>	262K	16.7M	16.7M	16.7M	16.7M
<b>Contrast Ratio(Typ.)</b>	650:1	1000:1	1000:1	1000:1	1000:1
<b>Suggested Resolution (Other resolution supported)</b>	1366×768@60Hz	1280×1024@60Hz	1366×768@60Hz	1280×1024@60Hz	1920×1080@60Hz
<b>Aspect Ratio</b>	16:9	5:4	16:9	5:4	16:9
<b>Display Response Time(Typ.)</b>	8ms	5ms	5ms	5ms	5ms
<b>Brightness(Typ.)</b>	Pure LCD Panel	250cd/m <sup>2</sup>			
	With PCAP Touchscreen	212cd/m <sup>2</sup>			
<b>Brightness from 300~1000cd/m<sup>2</sup> can be customized</b>					
<b>Viewing Angle (Typ.at CR&gt;10) (Other viewing angle can be custom)</b>	Horizontal (Left/ Right)	85°/ 85°			
	Vertical (Up/ Down)	80°/ 80°			
<b>Video Input</b>	VGA and DVI	VGA and DVI	VGA and DVI	VGA and DVI	VGA and DVI and HDMI
<b>Frequency(H/V)</b>	30~80KHz / 60~75Hz				
<b>Power Supply</b>	Type: External Brick Input (Line) Voltage: 100-240 VAC, 50-60 Hz				
<b>Environment</b>	Operating Temp.	0~50°C			
	Storage Temp.	-20~60°C			
	Operating RH	20%~80%			
	Storage RH	10%~90%			
<b>MTBF</b>	15,000 Hours	30,000 Hours	30,000 Hours	30,000 Hours	30,000 Hours
<b>Back Light Life(Typ.)</b>	15,000 Hours	30,000 Hours	30,000 Hours	30,000 Hours	30,000 Hours
<b>Power Consumption</b>	8W Max.	13.5W Max.	13W Max.	15.2W Max.	25W Max.
<b>Standby Power Consumption</b>	0.5W Max.	0.9W Max.	0.6W Max.	0.88W Max.	1.15W Max.
<b>Mount Interface</b>	1) VESA 75mm and 100mm 2) Mount Bracket, Horizontal or Vertical (Standard Mount Brackets Are Supplied)				
<b>OSD Control</b>	Buttons	AUTO,+,POWER,-,MENU			
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset			
<b>Touch System Interface</b>	USB				
<b>Touch Response Time</b>	≤10ms				
<b>Agency Approval</b>	ETL, FCC, CE, CB, RoHS, CCC				
<b>Regular Warranty</b>	1 Year				

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model