



Model: KOT-0150US-SA6BW

15" LCD Open Frame SAW Touch Monitor (The Water-proof Type )

## **Product Feature**

- ♦ Bezel seal standard: NEMA3 and IEC IP65
- Long lasting product cycle-enclosure controlled by Keetouch specifications
- Future generation panels phased-in without external changes
- High quality panel with high brightness.
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount
- KeeTouch'S SAW technology on pure glass for the ultimate in image quality
- ◆ Dual USB and Serial touch interface port
- **♦** Finger or gloved hand operation
- Worldwide agency approvals




## **Specification**

Model No.	KOT-0150US-SA6BW			
Series	OT, Water-proof			
Display Type	4:3 Ratio 15" Active matrix TFT-LCD			
Active Area	12" (304mm)×9" (228mm)			
Monitor Dimensions	Width: 347mm Height: 271mm Depth: 51mm			
Suggested Resolution	1024×768@60Hz			
Support Colors	16.2M			
Brightness(Typ.)	Pure LCD Pane	el	420cd/m <sup>2</sup>	
	With SAW Glas	ss screen	378cd/m <sup>2</sup>	
Response Time(Typ.)	16ms			
Viewing Angle	Horizontal(left/i	right)	80°/80°	
(Typ.at CR>10)	Vertical(up/dow	vn)	80°/80°	
Contrast Ratio(Typ.)	800:1			
Video Input	VGA and DVI			
Frequency(H/V)	30∼80KHz / 60∼75Hz			
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz			
Environment	Operating Temp.		0∼50°C	
	Storage Temp.		-20∼60°C	
	Operating RH:		20%~80%	
	Storage RH:		10%~90%	
MTBF	30,000 Hours			
LED Back light Life(Typ.)	30,000 Hours			
Weight(N.W/G.W)	N.W :3Kg (Single) /G.W:9Kg (2pcs in one package); (Approx.)			
package dimensions	422(L)*177(W)*351(H)mm (2pcs in one package)			
Mount Interface	1)VESA 75mm and 100mm 2)Mount bracket, horizontal or vertical (Standard mount brackets are supplied)			
	Buttons AUTO,+,POWER,-,MENU			
OSD Control	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset		
Touch Screen Type	15" SAW 6mm Water-proof touch screen			
Touch System Interface	Having USB and RS232 interface			
Touch Response Time	USB/Serial: 8.4/10.4ms			
Agency Approval	CCC, ETL, FCC, CE, CB, RoHS			
Regular Warranty	1 Year			

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model



## **Mechanical Dimensions**

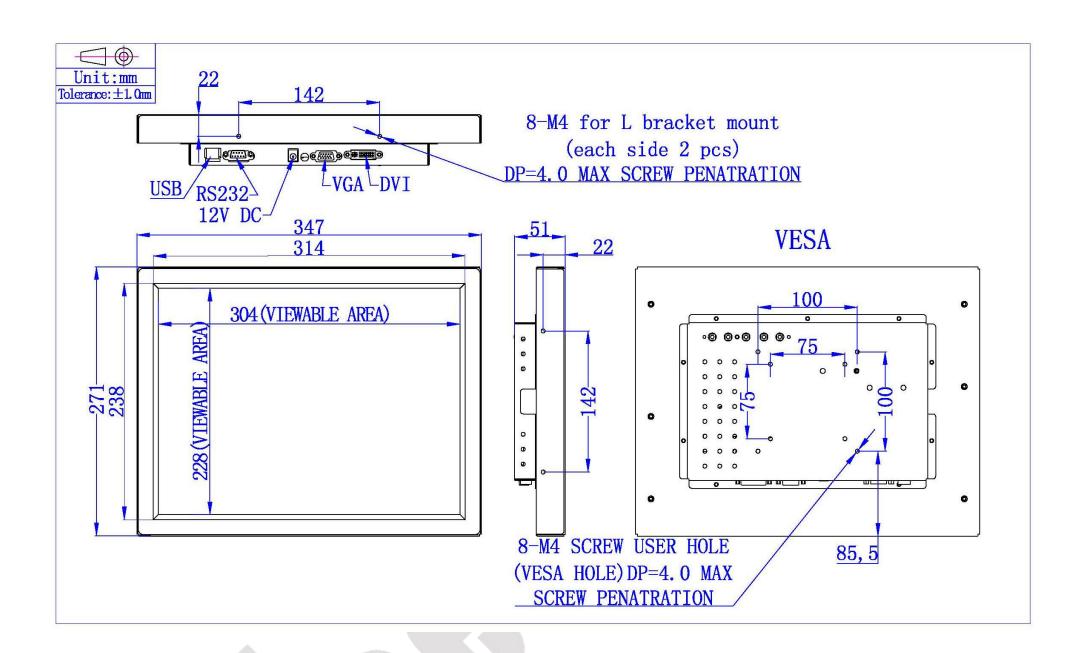

## **Record of revision**

Version	Date	Description
1.0	2017/06/07	Initial Release

Add: Level1, 3, 4, BLD 9, Luck-King Industry Park Gongyedong Road, Longhua District, Shenzhen 518109, P. R. China Tel: +86-755-82599797 Fax: +86-755-82599968

Tel: +86-755-82599797 E-mail: sales@keetouch.com

www.keetouch.com



KeeTouch reserves the right to change or update, without notice, any information contained herein; to change, without no construction, materials, processing or specifications of discontinue or limit production or distribution of any products