



**Model: KOT-0215U-CA2P
(PN: KOT-215P-003)**

21.5" LCD Open Frame PCAP Touch Monitor



Product Feature

- ◆ KeeTouch's Projective Capacitive technology on pure glass for the ultimate in image quality.
- ◆ Long lasting product cycle-enclosure controlled by Keetouch specifications.
- ◆ Future generation panels phased-in without external changes.
- ◆ High quality panel with high resolution, and high contrast ratio.
- ◆ Multiple mounting options including horizontal bracket mount, vertical bracket mount and VESA mount.
- ◆ Easy integration from side.
- ◆ Finger or stylus operation.
- ◆ USB touch interface port.
- ◆ VGA 、 DVI、 HDMI input video format.
- ◆ Worldwide agency approvals.
- ◆ CCC, ETL, FCC, CE, CB, RoHS certificates.




Specification

| | | |
|---------------------------------|---|----------|
| Model No. | KOT-0215U-CA2P | |
| Bezel Color | Black | |
| Diagonal Size | 21.5" diagonal | |
| Aspect Ratio | 16:9 | |
| Dimensions | 20.3" ×12.2" ×1.5" (516mm×311mm×38.5mm)max | |
| Active Display Area | 18.77" ×10.56"(476.64mm×268.11mm) | |
| Suggested Resolution | 1920×1080@60Hz | |
| LCD Technology | Active matrix TFT LCD with LED back lighting | |
| Support Colors | 16.7M | |
| Brightness(Typ.) | LCD Panel: 250 nits ; (Brightness from 300~1000cd/m ² can be customized) | |
| | With PCAP touch screen :215 nits | |
| Response Time(Typ.) | 5ms | |
| Viewing Angle (Typ.at CR>10) | Horizontal(left/right) | 85°/85° |
| | Vertical(up/down) | 80°/80° |
| Contrast Ratio(Typ.) | 1000:1 | |
| Video Input | VGA and DVI and HDMI | |
| Power Supply | Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz | |
| Environment | Operating Temp. | 0~50°C |
| | Storage Temp. | -20~60°C |
| | Operating RH | 20%~80% |
| | Storage RH | 10%~90% |
| MTBF | 30,000 Hours | |
| Weight (Approx.) | N.W :4.8kg; G.W:6.9kg | |
| Package Dimension | 610*410*145mm | |
| Power Consumption | 25W Max. /0.65W(Standby) | |
| Mount Options: | VESA 4-hole 100mm mounting interface on rear of unit 2-hole mounting interface on all 4 sides | |
| On-Screen Display (OSD) | Accessible through switches on the unit's tethered OSD Control box. Controls: Menu, Up, Down, Select; Settings: Brightness, Contrast, Clock, Phase, H-position, V- position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, OSD H-Position, OSD;V-Position, Recall Defaults, VideoSource; Languages: English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese; Lockouts: OSD, Power | |
| Agency Approval | CCC, ETL, FCC, CE, CB, RoHS | |
| Regular Warranty | 1 Year | |

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model

Mechanical Dimensions

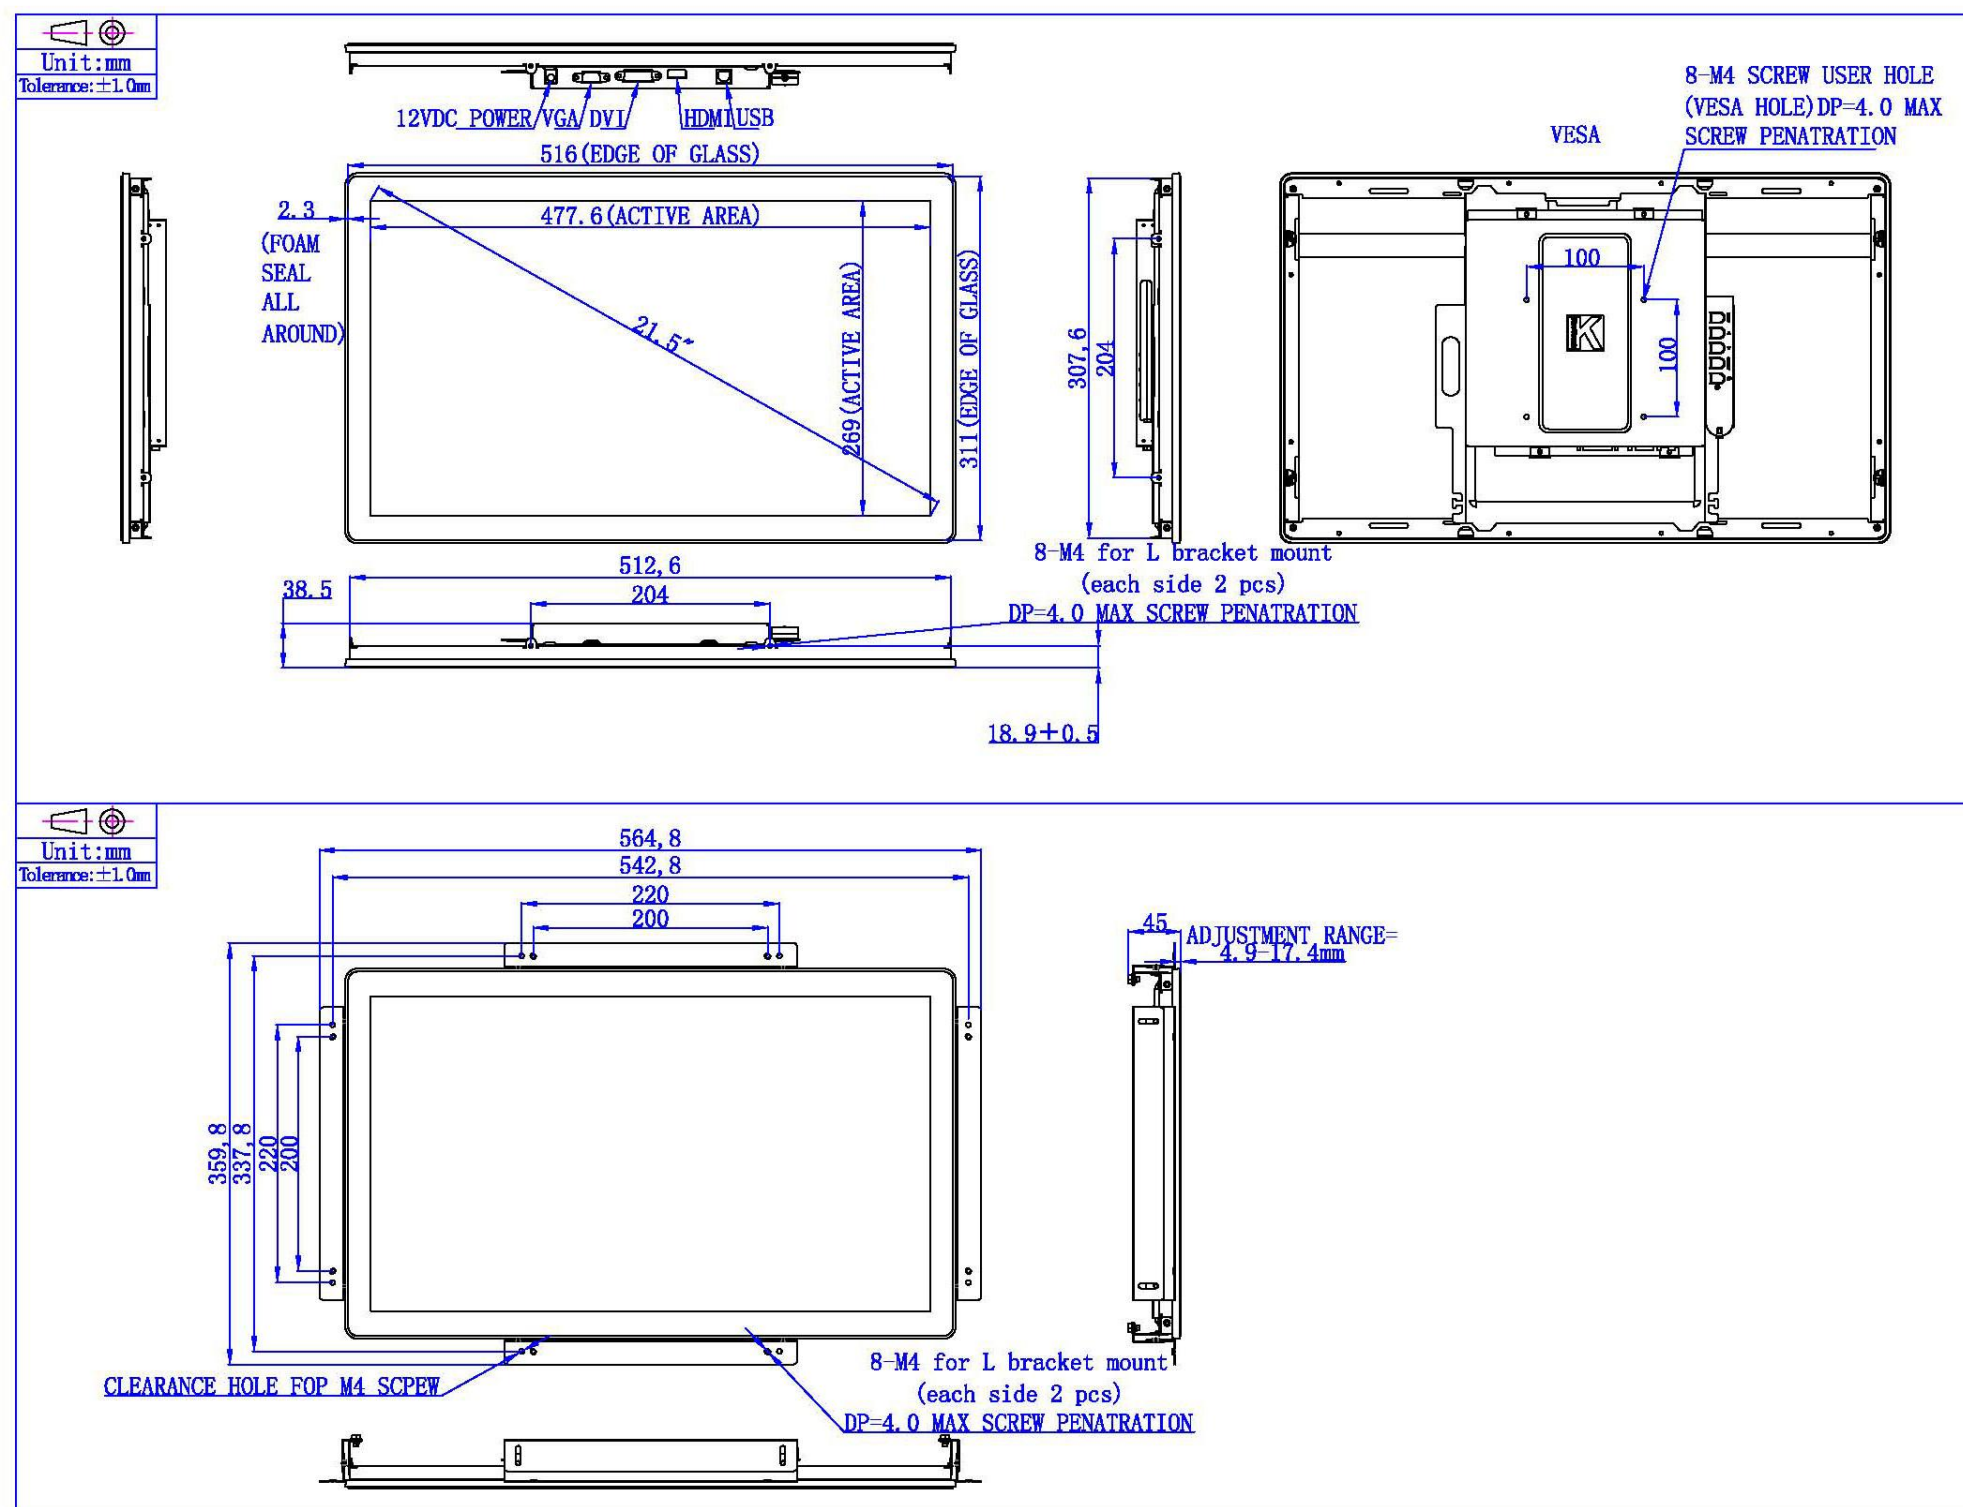

Revision History

| Revision | Date | Description |
|----------|------------|-----------------|
| 1.0 | 2017/06/07 | Initial Release |
| | | |

Add: Level1, 3, 4, BLD 9, Luck-King Industry Park Gongyedong Road, Longhua District, Shenzhen 518109, P. R. China

Tel: +86-755-82599797

Fax: +86-755-82599968

E-mail: sales@keetouch.com

www.keetouch.com

KeeTouch reserves the right to change or update, without notice, any information contained herein; to change, without no construction, materials, processing or specifications of discontinue or limit production or distribution of any products. and to discontinue or limit production or distribution of any products