



Model: KOT-0170US-SA4BCW

17" LCD Open frame SAW Touch Monitor

(the Water-proof and Compact Type)

© 1.0 2016/09 By Keetouch

Features & Application

Features

- ◆ Bezel seal standard: NEMA3 and IEC IP65
- ◆ Long lasting product cycle-enclosure controlled by Keetouch specifications
- ◆ Future generation panels phased-in without external changes
- ◆ High quality panel with high brightness, high contrast ratio and broad viewing angle
- ◆ Multiple mounting options including VESA mount ,horizontal or vertical bracket-mount
- ◆ Compact and slim profile for easy integration from side, top and bottom
- ◆ Keetouch's SAW technology on pure glass for the ultimate in image quality
- ◆ Dual USB/Serial touch interface port
- ◆ Dual VGA/DVI input video format

Application

- ◆ Gaming/Casino Systems
- ◆ Outdoor and indoor Kiosks
- ◆ Entertainment
- ◆ Transport and Ticketing
- ◆ Hospitality
- ◆ Banking
- ◆ Customized Solutions

Accessories

- ◆ Power Cable: A North American power cable or an European power cable is included according to the end user's area
- ◆ Power Supply Brick: A power supply brick is included
- ◆ Touch/Video/DVI Cables: Detachable serial or USB touch cable, video cable and DVI cable are included
- ◆ L-brackets: Four standard L-brackets are included




A Professional Touch Products Manufacturer!

Specification

Model No.	KOT-0170US-SA4BCW;		
Series	OT, Water-proof and Compact		
LCD Type	5:4 Ratio 17 " Active matrix TFT-LCD, LED backlight		
Display Active Area	13.3 " (338mm)×10.6 " (270mm)		
Monitor Dimensions	Width: 369mm Width with brackets: 389.4 mm Height: 307mm Height with brackets: 327.4mm Depth: 49mm for 4mm touch screen glass (no include lip)		
Suggested Resolution	1280×1024@60Hz		
Support Colors	16.7M		
Brightness(Typ.)	Pure LCD Panel	250cd/m ²	
	With SAW Glass	225cd/m ²	
Response Time(Typ.)	5ms		
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	85°/85°	
	Vertical(up/down)	80°/80°	
Contrast Ratio(Typ.)	800:1		
Video Input	RGB and DVI		
Frequency (H/V)	30~80KHz / 60~75Hz		
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz		
Environment	Operating Temp.	0~50°C	
	Storage Temp.	-20~60°C	
	Operating RH:	20%~80%	
	Storage RH:	10%~90%	
MTBF	50,000 Hours		
Back light Life(Typ.)	50,000 Hours		
Weight (N.W/G.W)	N.W :5Kg (Single) /G.W:12.8Kg (2pcs in one package); (Approx.)		
package dimensions	445 (L)*200(W)*395(H)mm (2pcs in one package)		
Power Consumption	16W Max.		
Standby power consumption	0.95W(Approx)		
Mount Interface	1)VESA 75mm and 100mm 2)Mount bracket, horizontal or vertical (Standard mount brackets are supplied)		
OSD Control	Buttons	AUTO,+,POWER,-,MENU	
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset	
Touch screen Type	KeeTouch 17" SAW 4 mm compact touch sensor		
Touch System Interface	Having USB and Serial(RS232) interface		
Touch Response time	USB/Serial: 8.4/10.4ms		
Agency Approval	CCC, ETL, FCC, CE, CB, RoHS, UL, TCO3		
Regular Warranty	1 year		

NOTE:The display SPEC. will change follow the relevant LCD panel brand and mode

Mechanical Dimensions

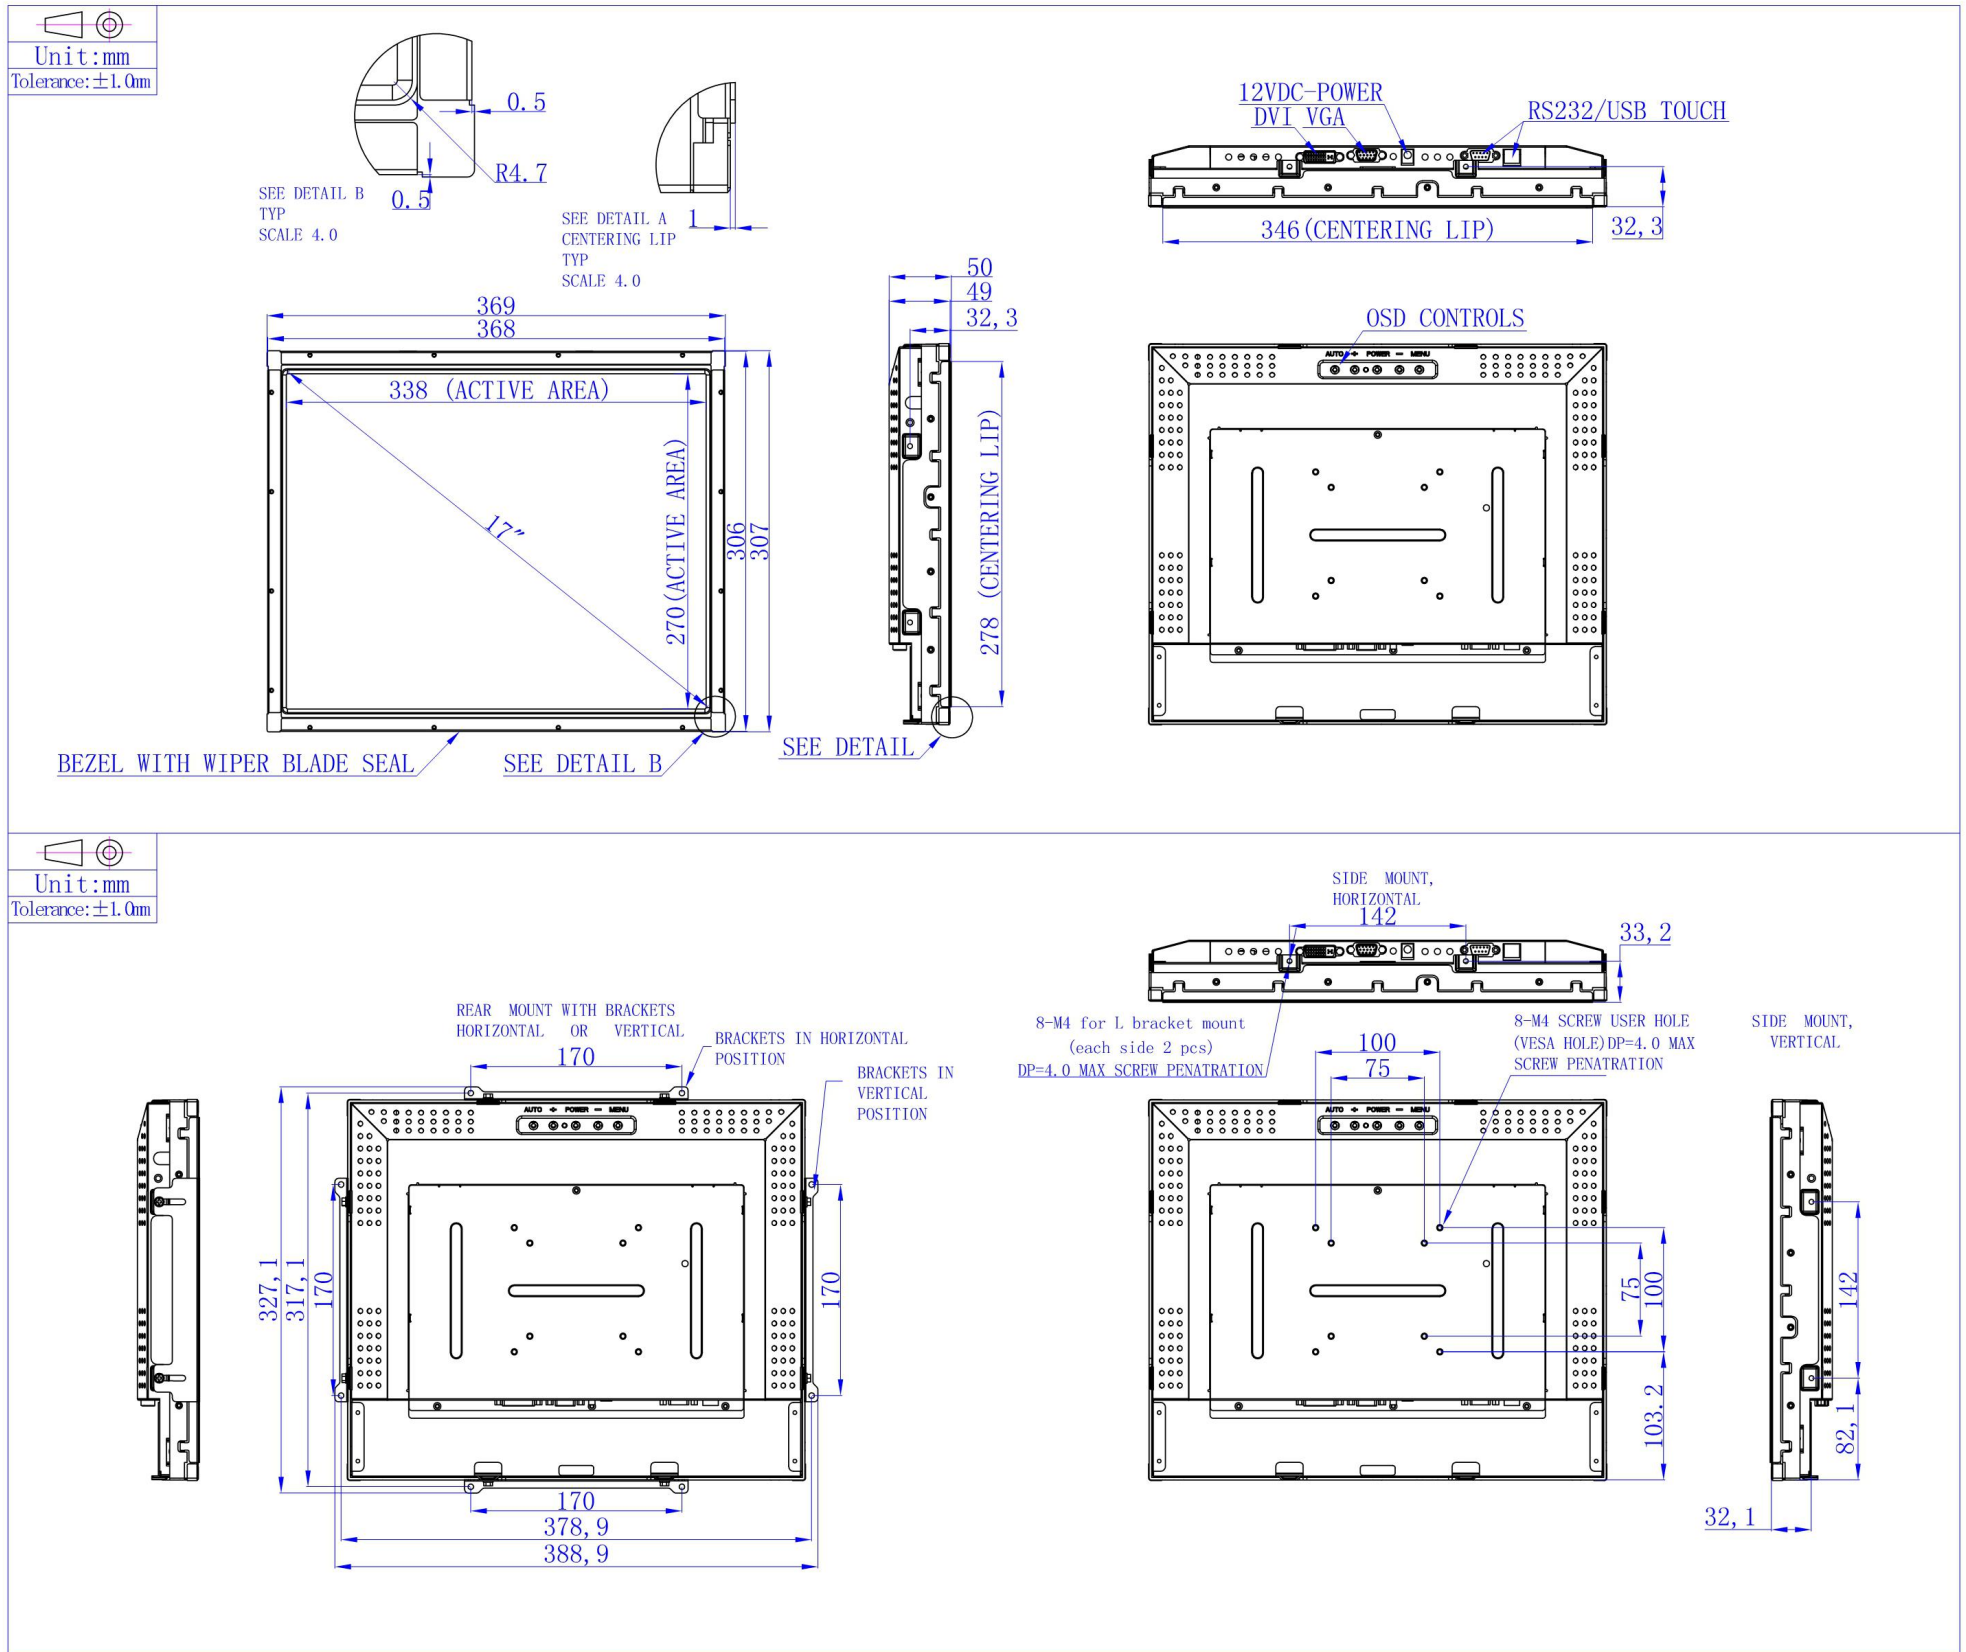

Record of revision

Version & Date	Old description	New description
1.0 2016/09/14	First Edition for Customer	