



**Model: KOT-0215U-CA4P  
(PN: KOT-215P-015)**

21.5" LCD Pure Flat PCAP Touch Monitor

## Product Feature


- ◆ KeeTouch's Projected Capacitive technology on pure glass for the ultimate in image quality.
- ◆ Long lasting product cycle-enclosure controlled by KeeTouch specifications.
- ◆ Future generation panels phased-in without external changes.
- ◆ High quality panel with high resolution and high contrast ratio .
- ◆ Multiple mounting options including horizontal bracket mount, vertical bracket mount and VESA mount.
- ◆ Easy integration from side.
- ◆ Finger or stylus operation.
- ◆ USB touch interface port.
- ◆ VGA and DVI input video format.
- ◆ Worldwide agency approvals.
- ◆ CCC, ETL, FCC, CE, CB, RoHS certificates.

## Specification

<b>Model No.</b>	KOT-0215U-CA4P	
<b>Series</b>	OT, Pure Flat	
<b>Display Type</b>	16:9 Ratio 21.5" Active Matrix TFT-LCD, LED Backlight	
<b>Display Active Area</b>	18.77"(476.64mm)×10.56"(268.11mm)	
<b>Touch Active Area</b>	477.64mm×269mm	
<b>Monitor Dimensions</b>	<b>Width:</b> 515.8mm <b>Height:</b> 307.3mm <b>Depth:</b> 47mm for 4.3mm Touchscreen	
<b>Suggested Resolution</b>	1920×1080 @ 60Hz	
<b>Support Colors</b>	16.7M	
<b>Brightness(Typ.)</b>	Pure LCD Panel (Brightness from 300~1000cd/m2 can be customized)	250cd/m <sup>2</sup>
	With Projected Capacitive Touchscreen	212cd/m <sup>2</sup>
<b>Display Response Time(Typ.)</b>	5ms	
<b>Viewing Angle (Typ.at CR&gt;10)</b>	Horizontal(Left/Right)	85°/85°
	Vertical(Up/Down)	80°/80°
<b>Contrast Ratio(Typ.)</b>	1000:1	
<b>Video Input</b>	VGA and DVI	
<b>Frequency(H/V)</b>	30~80KHz / 60~75Hz	
<b>Power Supply</b>	Type: External Brick Input (Line) Voltage: 100-240 VAC, 50-60 Hz	
<b>Environment</b>	Operating Temp.	0~50°C
	Storage Temp.	-10~60°C
	Operating RH	20%~80%
	Storage RH	10%~90%
<b>MTBF</b>	30,000 Hours	
<b>LED Back Light Life(Typ.)</b>	30,000 Hours	
<b>Power Consumption</b>	20w/2w (Standby)	
<b>Mount Interface</b>	1)VESA 75mm and 100mm 2)Mount Bracket, Horizontal or Vertical	
<b>OSD Control</b>	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
<b>Touch Screen Type</b>	21.5" Projected Capacitive Touchscreen, 10 Points in Win7	
<b>Touch System Interface</b>	USB	
<b>Touch Response Time</b>	≤ 10ms	
<b>Package Dimension</b>	605×195×400(2pcs in One Package)	
<b>Agency Approval</b>	CCC, ETL, FCC, CE, CB, RoHS	
<b>Regular Warranty</b>	1 Year	

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model

## Mechanical Dimensions

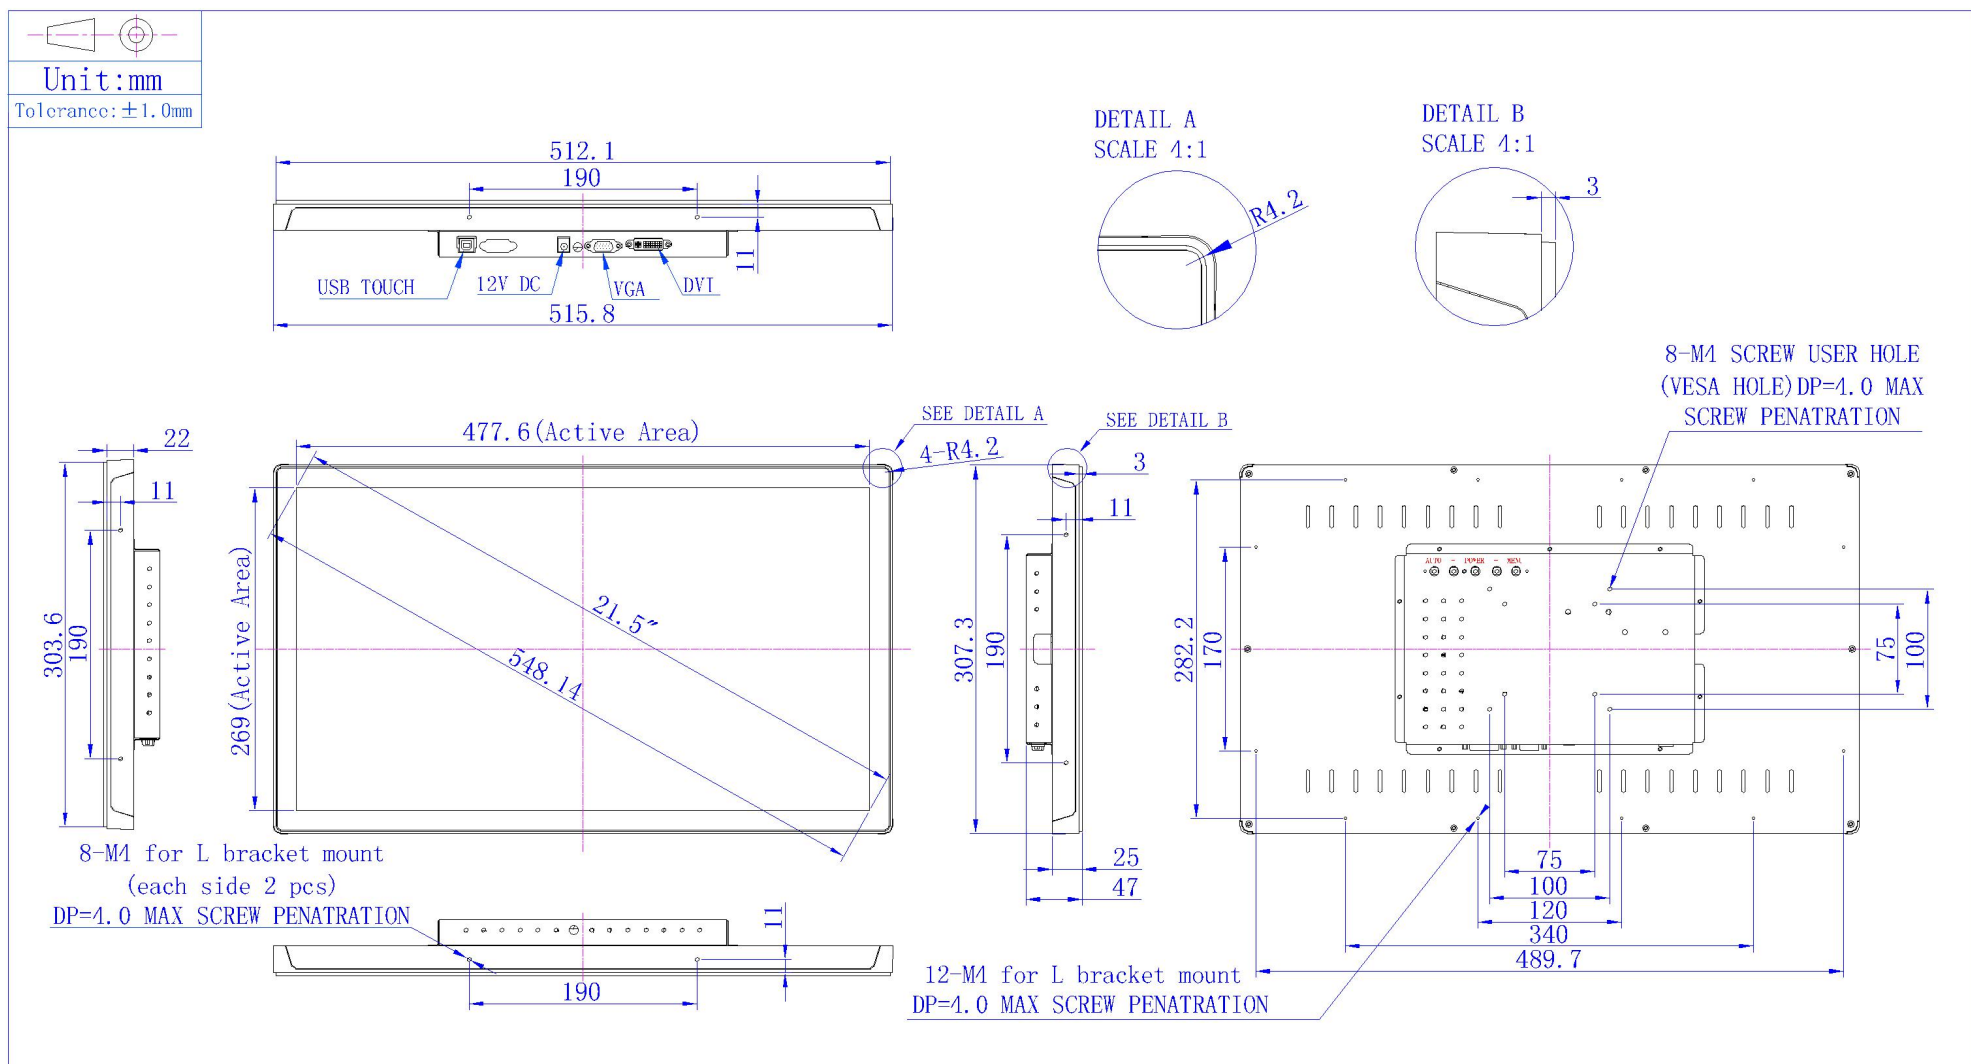

## Revision History

Revision	Date	Description
1.0	2017/06/07	Initial Release